

TVIOD-PR2IR36

HD Over Coax 2MP 1080p IR Dome w/ 3.6mm Lens

- Up to 2MP (1080p) resolution
- Adopt HDTVI Technology
- Up to 60' IR
- IP66 Weather Rating




Megapixels:	2MP
Image Resolutions:	2MP (1920x1080) / 1.3M (1280x960) / 720P (1280x720) / D1 (704x576/704x480)
Image Sensor:	2 MP CMOS Image Sensor
Min Illumination:	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
LEDs:	N/A
IR Distance:	60 feet
OSD:	Yes
Operating Temperature	-40°F to +140°F
Dimension:	3.53 in x 3.53 in x 2.33 in
Power:	12V DC

TVIOD-PR2IR36

HD1080P IR Turret Camera


TURBO HD

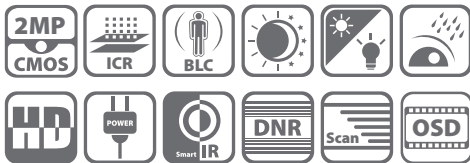

Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night, Smart IR
- 60' IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

Dimensions

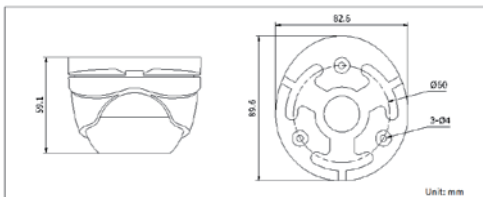

TVIOD-PR2IR36	
Camera	
Image Sensor	2 MP CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1 / 25(1 / 30) s to 1 / 50,000 s
Lens	3.6mm Angle of View: 84.3°(3.6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p @25fps / 1080p @30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
Menu	
AGC	Support
D / N Mode	Color/ BW/ EXT
White Balance	Auto/ Manual
BLC	Support
Language	English/ Chinese
Functions	Digital noise reduction, Mirror
General	
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 3W
Weather Proof Ratings	IP66
IR Range	Up to 20m
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimensions	89.6 × 59.1 mm (3.53" × 2.33")
Weight	400g (0.88 lb)