

TVIOD-PR5EXIR28

Prime 5MP Turbo HD True WDR EXIR Dome Security Camera

- 5MP Resolution
- 2.8mm Fixed Lens
- IP67 ingress protection
- Up to 131 feet IR with EXIR



Megapixels:	5MP
Max Resolution:	5MP
Image Resolutions:	5MP (2592 x 1944)
Image Sensor:	5MP CMOS image sensor
Min Illumination:	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
LEDs:	2
IR Distance:	131 feet
OSD:	Yes
Operating Temperature	-40°F to +140°F, humidity: 90% or less (noncondensation)
Dimension:	4.33in x 4.33in x 3.67in
Power:	12V DC ±30%



TVIOD-PR5EXIR28

5 MP EXIR Turret Dome Camera


Specifications

Camera	
Image Sensor	5 MP CMOS image sensor
Effective Pixels	2592 (H) × 1944 (V)
Min. illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Lens	2.8 mm
Horizontal Field of View	86.5°
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	2592 × 1944 @ 20fps
HD Video Output	1 HD analog output
Menu	
AGC	Support
D/N Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MWB
BLC	Support
Language	English, Chinese
Functions	Brightness, Sharpness, Digital noise reduction, Mirror, Bad pixel correction, Smart IR
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 V DC ± 30%
Power Consumption	Max. 5 W
Protection Level	IP67
IR Range	Up to 40 m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	Φ 110 mm × 93.2 mm (Φ 4.33" × 3.67")
Weight	Approx. 350 g (0.77 lb.)

TVIOD-PR5EXIR28

5MP EXIR Turret Dome Camera

Dimensions

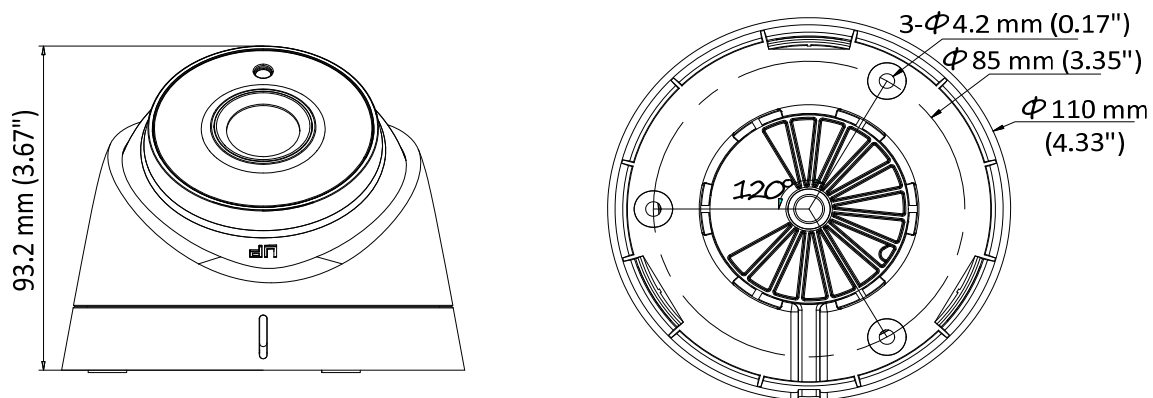

Accessories



PM-PR1275ZJ

Vertical Pole Mounting Bracket



CM-PR1276ZJ

Corner Mounting Bracket