


TVIOD-PRE2IR28

**Prime 2MP HD TVI 1080P Dome Camera
w/2.8mm Lens**

- HD-TVI Technology
- 2.8mm Fixed Lens
- IP66 ingress protection
- Up to 65 feet IR with EXIR



Megapixels:	2MP
Max Resolution:	1930 x 1088
Image Resolutions:	2MP (1930 x 10088)
Image Sensor:	1/3 inch Progressive Scan CMOS
Min Illumination:	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
LEDs:	12
IR Distance:	65 feet
OSD:	Yes
Operating Temperature	-40° F to 140° F, humidity: 90% or less
Dimension:	3.53in x 3.53in x 2.33in
Power:	12V DC

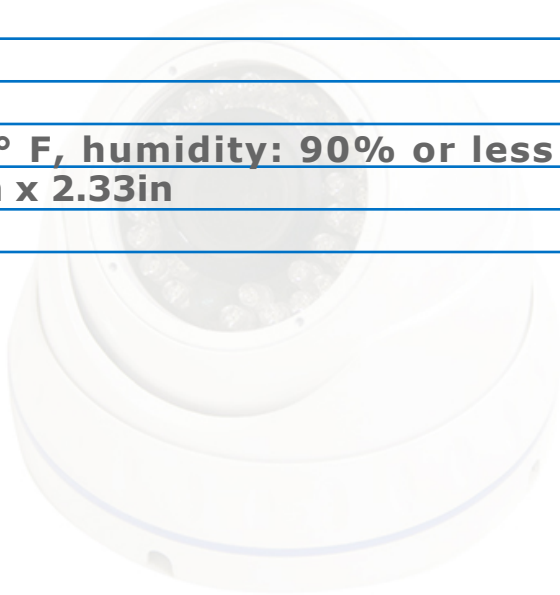

TVIOD-PRE2IR28

2 MegaPixel Turret Camera

Specification

Model	TVIOD-PRE2IR28
Parameter	Turbo HD 1080p IR Turret Camera
Camera	
Image Sensor	1/2.7" Progressive Scan CMOS 1/3" Progressive Scan CMOS(only 2.8mm)
Signal System	PAL/NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	2.8mm
	Angle of View: 105.8°
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 turbo HD output
S/N Ratio	More than 52dB
Menu	
AGC	Support
D/N Mode	Color/ BW/ EXT
White Balance	Auto/Manual
BLC	Support
Language	English/ Chinese
Functions	Digital noise reduction, Mirror
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 3W
Weather Proof Ratings	IP66
IR Range	Up to 65ft
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimension	89.6 × 59.1 mm (3.53" × 2.33")
Weight	240 g (0.53 lb)

TVIOD-PRE2IR28

2 MegaPixel Turret Camera

Dimension

