

TVIPTZ-PR2L23X

HD Over Coax 2MP 1080p 23X PTZ


- 2MP CMOS Image Sensor
- 23X optical zoom, 16X digital zoom
- 4-92mm Lens
- IP66 weatherproof



Megapixels:	2MP
Image Resolutions:	2MP (1920x1080) / 1.3M (1280x960) / 720P (1280x720) / D1 (704x576/704x480)
Image Sensor:	1/3 inch CMOS
Min Illumination:	Color: 0.2Lux@ (F1.6,AGC ON) ; B / W: 0.02Lux@ (F1.6,AGC ON)
LEDs:	N/A
IR Distance:	N/A
OSD:	Yes
Protocol:	Peco D, Pelco P
Operating Temperature	-22°F to +140°F
Dimension:	11.84in x 3.974in x 4.23in
Power:	24v AC
Pan Rotation:	360°
Tilt:	-5°-90° (Auto Flip)
Touring:	Yes

TVIPTZ-PR2L23X


1080P Analog PTZ Dome Camera

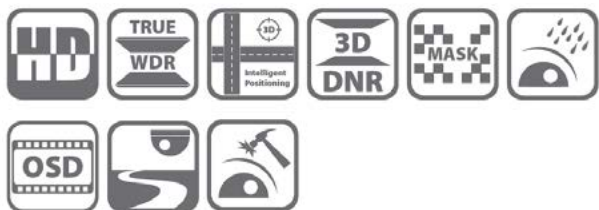

Key features

- 2MP CMOS Image Sensor
- Full HD 1080P Video Output
- 23X optical zoom, 16X digital zoom
- Support up the coax function
- Privacy Masking, 3D DNR, D WDR, EIS
- 3D intelligent positioning
- True Day&Night

Dimensions



	TVIPTZ-PR2L23X
Camera	
Image Sensor	1 / 3" CMOS
Effective Pixel	3270K
Horizontal Resolution	1100TVL
Signal System	PAL / NTSC
Min. Illumination	Color: 0.2Lux@(F1.6,AGC ON) ; B / W: 0.02Lux@(F1.6,AGC ON)
White Balance	Auto / Manual / ATW / Indoor / Outdoor
AGC	Auto / Manual
S / N Ratio	≥50dB
3D DNR	Support
Digital WDR	Support
EIS	Support
Backlight Compensation	Support
Shutter Time	PAL: 1-1 / 10,000s ; NTSC: 1-1 / 10,000s
Day & Night	IR Cut Filter
Digital Zoom	16x
Privacy Mask	8 privacy masks programmable; a maximum of 8 zones can be masked simultaneously on the same video screen
Focus Model	Auto / Semiautomatic / Manual
Lens	
Focal Length	4-92mm, 23X
Zoom Speed	Approx.3.0s(Optical Wide-Tele)
Angle of View	49-2.2 degree(Wide-Tele)
Min. Working Distance	10-1000mm (Wide-Tele)
Aperture	F1.6-F3.7
Pan and Tilt	
Pan Range	360° endless
Pan Speed	Pan Manual Speed: 0.1°-250° / s; Pan Preset Speed: 300° / s
Tilt Range	-5°-90° (Auto Flip)
Tilt Speed	Tilt Manual Speed: 0.1°-150° / s; Tilt Preset Speed: 200° / s
Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
Number of Preset	256
Patrol	8 patrols, up to 32 presets per patrol
Pattern	4 patterns, with the total recording time not less than 10 minutes
Power-off Memory	Support
Park Action	Preset / Patrol / Pattern / Pan scan / Tilt scan / Frame Scan / Random scan / Panorama scan
PTZ Position Display	On / Off
Preset Freezing	Support
Scheduled Task	Preset / Patrol / Pattern / Pan scan / Tilt scan / Frame Scan / Random scan / Panorama scan
RS-485 communication diagnosis	Support
Input / Output	
Monitor Output	1.0V[p-p] / 75Ω, NTSC (or PAL) composite, BNC
RS-485 Interface	Half-duplex mode; Self-adaptive HIKVISION, Pelco-P, Pelco-D protocol
UTC function	Self-adaptive PELCO_C, HDCAM_C(need UTC controller)
General	
Menu Language	English, Chinese
Power	24VAC; Outdoor dome: Max. 20W (Heater On), Max. 12W(Heater Off);
Working Temperature / Humidity	-30 ℃-65℃(-22°F-149°F)(outdoor dome) 90% or less
Protection Level	IP66 standard (outdoor dome) TVS 4,000V lightning protection, surge protection and voltage transient protection
Mounting	Various mounting modes optional
Dimensions	φ220×305mm (φ8.66"×12.00")(Outdoor);
Weight (approx.)	5Kg (11.02lbs)
Mount Option (only suitable for outdoor dome)	Long-arm wall mount; Corner mount Pole Mount; Power box mount
Weight	500g