


TVIVD-PR2EXIRZ

2MP Prime HD TVI True WDR Weatherproof EXIR Motorized Varifocal Vandal Dome Camera

- 2.8-12mm Varifocal Optical Zoom
- Up to 131 feet IR distance
- Motorized varifocal lens
- IK10 Vandal Proof
- Dual Voltage 12V DC/24V AC



Megapixels:	2MP
Max Resolution:	1080p
Image Resolutions:	2MP (1920 x 1080.)
Image Sensor:	2MP CMOS Image Sensor
Min Illumination:	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
LEDs:	N/A
IR Distance:	131
OSD:	Yes
Operating Temperature	-40°F to +140°F, humidity 90% or less (non-condensing)
Dimension:	5.72in x 5.72n x 4.89in
Power:	12V DC/24V AC ±15%

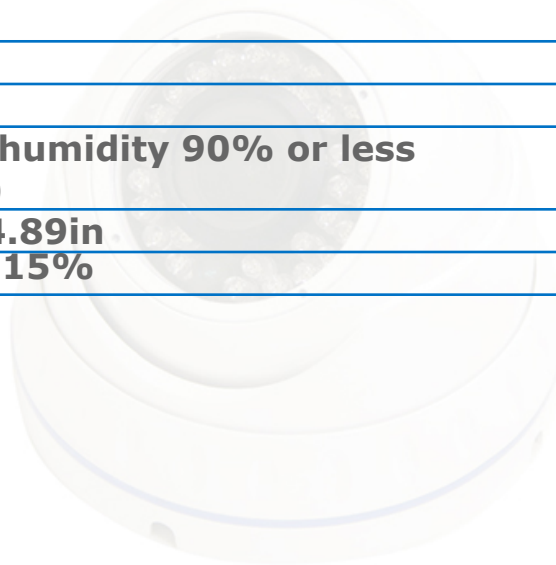

TVIVD-PR2EXIRZ

HD1080P TVI Motorized VF Vandal Proof EXIR Dome Camera

Specifications

Image Sensor	2MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1928(H)*1088(V)
Min. illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25s to 1/50,000s
Lens	Motorized VF lens; 2.8 - 12 mm @ F1.2
Lens Mount	φ14
Day & Night	ICR
Angle Adjustment	Pan: 0°- 340° ;Tilt:0°- 75°, Rotate: 0°- 355°
Synchronization	Internal Synchronization
WDR	120dB
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S/N Ratio	>62dB
Menu	
AGC	Support
D/N Mode	Color/BW/SMART
White Balance	ATW/ MWB
BLC	Support
Functions	Wide Dynamic Range, Digital noise reduction, Mirror, SMART
General	
Operating Conditions	-40 °C- 60 °C (-40 °F- 140 °F),Humidity 90% or less (non-condensing)
Power Supply	12V DC/24V AC ±15%
Power Consumption	Max. 4.5W; -A: Max. 6.5W
Protection Level	IP66
IR Range	Up to 40m
Impact Protection	IK10
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	φ 145.2mm×124.1mm (φ5.72"×4.89")
Weight	Approx. 1600g (3.53lb)

Dimensions

