

TVIVD-PR2IR36

HD Over Coax 2MP 1080p IR Vandal Dome w/3.6mm Lens

- Up to 2MP (1080p) resolution
- Adopt HDTVI Technology
- Vandal Proof IK10 Rating
- Up to 60' IR



Megapixels:	2MP
Image Resolutions:	2MP (1920x1080) / 1.3M (1280x960) / 720P (1280x720) / D1 (704x576/704x480)
Image Sensor:	2 MP CMOS Image Sensor
Min Illumination:	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
LEDs:	N/A
IR Distance:	60 feet
OSD:	Yes
Operating Temperature	-40°F to +140°F
Dimension:	4.37 in x 4.37 in x 3.24 in
Power:	12V DC

TVIVD-PR2IR36

HD1080P Vandal Proof IR Dome Camera


TURBO HD



Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night, Smart IR
- Up to 20m IR distance
- Vandal proof
- OSD menu controlled via UTC

Dimensions

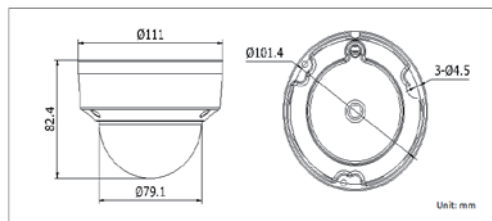

TVIVD-PR2IR36	
Camera	
Image Sensor	2 MP CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	1/25(1/30) s to 1/50,000 s
Lens	3.6mm
	Angle of View: 84.3°
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
Menu	
AGC	Support
D/N Mode	Color/ BW/ EXT
White Balance	Auto/ Manual
BLC	Support
Language	English/ Chinese
Function	Digital noise reduction, Mirror
General	
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 3W
IR Range	Up to 20m
Impact Protection	IK10
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimensions	Φ 111 × 82.4 mm (Φ 4.37" × 3.24")
Weight	550g (1.21 lbs)