

TVIVD-PR2IRV

HD Over Coax 2Mp 1080p IR Varifocal Vandal Dome


- 2 Megapixel high-performance CMOS
- 2.8-12mm vari-focal lens
- Up to 120 feet IR
- IP66 weatherproof



Megapixels:	2MP
Image Resolutions:	2MP (1920x1080) / 1.3M (1280x960) / 720P (1280x720) / D1 (704x576/704x480)
Image Sensor:	1/3 inch Progressive Scan CMOS
Min Illumination:	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR / 0.014 Lux @ (F1.4,AGC ON),0 Lux with IR
LEDs:	N/A
IR Distance:	120 feet
OSD:	Yes
Operating Temperature	-22°F to +140°F
Dimension:	5.72in x 5.72in x 4.89in
Power:	12v DC, 24v AC

TVIVD-PR2IRV


HD1080P Turbo HD Outdoor Vandal Proof IR Dome Camera

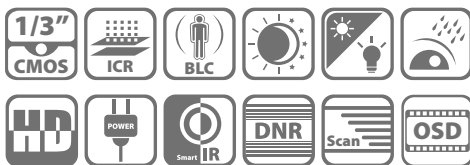

Key features

- HD1080P Video Output
- Adopt HDTVl Technology
- True Day/Night
- 2.8 - 12mm vari-focal lens
- OSD menu, 3D DNR, Smart IR
- Up to 40m IR distance
- IP66 weatherproof & Vandal Proof
- Up the Coax(via coaxial cable)
- 120 dB Wide Dynamic Range

Dimensions

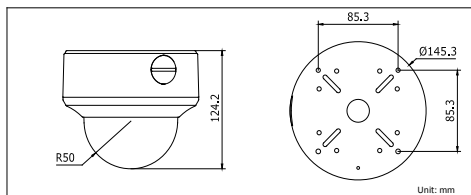

TVIVD-PR2IRV	
Camera	
Image Sensor	1 / 3" Progressive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1920(H)*1080(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR 0.014 Lux @ (F1.4,AGC ON),0 Lux with IR
Shutter speed	1/25(1/30) s to 1/50,000 s
Lens	2.8-12mm @ F1.4 Angle of view: 92° - 32°
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 355°, Tilt: 0 - 80°, Rotation: ± 90°
Day & Night	ICR
Wide dynamic range	120 dB
Synchronization	Internal synchronization
Video Frame Rate	1080p @25fps/1080p @30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω / BNC)
S / N Ratio	More than 52dB
Menu	
Scene	Indoor, Outdoor, Indoor1, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Privacy Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic
Function	Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM
General	
Working Temperature / Humidity	-30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC ; -A: 12 VDC, 24 VAC
Power Consumption	12 VDC: Max. 4W ; 24 VAC: Max. 5W
Weather Proof Ratings	IP66
IR Range	Up to 40m
Impact Protection	IEC60068-2-75 test, Eh, 20J; EN50102, up to IK10.
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)
Dimensions	φ145.3 × 124.2 mm (φ5.72" × 4.89")
Weight	880 g (1.95 lb)