


Product Specifications

VD-EF700L2812

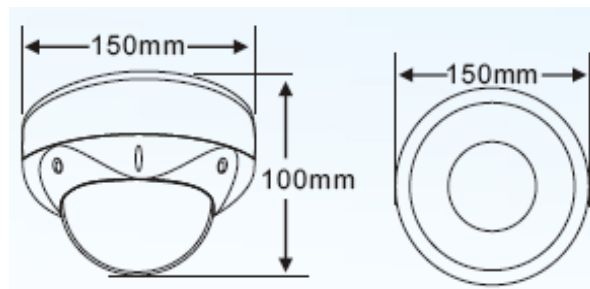

Description	700TVL Color Vandalproof Dome Camera
Model	VD-EF700L2812
Imaging Sensor	1/3" Sony ExView HADII CCD + Sony Effio-E DSP
Total Pixels	PAL: 610K; NTSC: 520K
Effective Pixels	PAL: 570K; NTSC: 480K
Horizontal resolution	Color 700TVL Dual voltage
Signal System	PAL/ NTSC
Minimum Illumination	0.001Lux
Syn. System	Internal Synchronization
Shutter speed	PAL:1/50~1/100000s; NTSC:1/60~1/100000s
Lens	2.8-12mm magepixel lens
S/N Ratio	More than 50dB (AGC OFF)
Video Output	1.0Vp-p, 75 ohms
Privacy Zone	1~8 Zones
Motion Detection	1~4 areas
Image Brightness	Adjustable
White Balance	Auto/Manual/Auto Tracking
Mirror	On/Off
OSD Control	English/Simplified Chinese 8 languages
Backlight Compensation	On/Off
Contrast	Adjustable
Sharpness	Adjustable
Power Supply	DC 12V / AC 24V
Operating Temperature	-10 °C ~ + 50 °C / 14°F ~ 122°F