



VEILUX®

MINI SPEED DOME CAMERA

VP-58CDN12X



SPECIFICATIONS

ITEM	VP-58CDN12X	
Signal System	NTSC	PAL
Image Sensor	1/4" SONY Super HAD CCD	
CCD Total Pixel	811(H) x 508 (V) 410K	795 (H) x 596 (V) 470K
Resolution (H)	Color: 580TVL, B/W: 680TVL	
Lens	12x f=3.94~46.05mm (F1.67~1.88) Digital : 16X / Total: 192X	
Min. Illumination	0.2 Lux/F1.6(Color): 50IRE) 0.04Lux/F1.6(B/W: ICR On)	
Luminance S/N Ratio	More than 52dB	
Video Output	Composite video output 75Ω Terminated	
Pan Rotation Angle	360° Endless	
Pan Speed	Manual:0.05°~150°/sec(64step)/Preset: Max 250°/sec	
Tilt Rotation Angle	-2°~90°	
Tilt Speed	Manual:0.05°~150°/sec(64step)/Preset: Max 250°/sec	
System Accuracy	0.05°	
Auto Scan	360° Endless	
Pattern	8 programmable Patterns (total 480 seconds)	
Sector	8 selectable sectors with 16 characters	
Home Position	Yes (Preset / Tour / Pattern / Scan)	
Password Protection	Yes	
Privacy Zone	8	
Image Stabilizer	Yes	
WDR	No	
SSNR	Yes	
SSDR	Yes	
DSS	On / Off	
BLC	On / Off	
HLC	On / Off	
Day & Night	Auto / Day / Night	
Flickerless	On/ Off	
Alarm Input	4 alarms (with various programmable states)	
Alarm Actions	Activate preset, Group Tour, Pattern	
OSD Menu	Yes	
Power Supply	DC12V 50/60Hz 1.5A	



FEATURES

- 1/4" SONY Super HAD CCD
- High Resolution - 580 TV Lines
- 0.05° Dome System Accuracy
- 220 Preset Position
- External Firmware Upgrade (RS-485)
- Home Position & Recover (Preset/Tour/Pattern/Scan)
- Controlling Pan/Tilt Speed while Zooming
- 8 Privacy Masking Zones
- Quick Operation Keys
- OSD for Camera Control
- Max 250° / sec Speed on Preset Mode
- Vandal-Proof Poly Carbonate Clear Dome Cover (IP66)


OPTIONAL

- Wall Mount



Model# VM-VP

DIMENSION

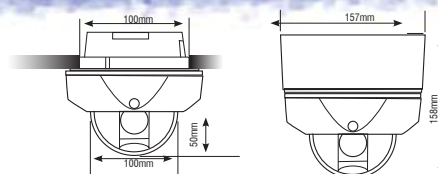

Mini PTZ Dimension

Ceiling Mount Dimension



VEILUX®

The Art of Surveillance

802 Greenview Dr., Suite 200, Grand Prairie, TX, 75050

Local Number: (214) 635-4855 / Fax: (214) 988-2858

Website: www.veilux.net

E-mail: Sales@veilux.net