

Quick Installation Guide

24-port 10/100M Ethernet Web-Smart PoE switch with 2 copper gigabit RJ-45 ports and 2 gigabit SFP ports (af Version 15.4W)




Table of Contents

• Introduction	Page 2
• Power Over Ethernet (PoE) & Features	Page 2
• Unpacking and Installation	Page 3
• System Requirement.....	Page 3
• Front Panel /LED.....	Page 4
• Hardware Installation....	Page 5
• Technical Specification.....	Page 6
• Managed Web-Smart.....	Page 7
• Troubleshooting	Page 8

•FCC Warning:

This device has been tested and found to comply with the regulations for Class B digital equipment. Pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with users guide, may cause harmful interference to radio communications. Operation of this devices in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his/her own expense.

•CE Mark Warning:

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

•UL Warning:

- 1> Elevated Operating Ambient Temperature- If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, Consideration should be given to installing the equipment in an environment compatible with manufacturer's maximum rated ambient temperature
- 2> Reduced Air flow-installation of equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.
- 3> Mechanical Loading- mounting of the equipment in the rack should be such as that a hazardous Conditions is not achieved due to uneven mechanical loading.

IMPORTANT

This users guide contains information on the limitations regarding product use and function and information on the limitations as to liability of the manufacturer. Read the entire guide carefully

1. Introduction

The MODEL is a managed 10/100Mbps Ethernet Web-Smart PoE switch designed to enhance workgroup performance while providing a high level of flexibility. It provides 24 10/100Mbps ports and 24 IEEE802.3af Power over Ethernet (PoE) ports for workstation, plus 2 copper Gigabit ports and 2 Gigabit SFP ports for workgroup and departments

The MODEL is a Power Source Equipment (PSE) and fully compatible with Powered Devices (PD) that comply with the IEEE 802.3af PoE standard. The MODEL PoE Switch enables users to attach IEEE802.3af compliant devices such as wireless Access Points (APs), VOIP phone, IP camera, printer and Network Attached Storage (NAS) directly to the 24 -ports 10/100 Ethernet PoE Switch plus 2 copper Gigabit ports and 2 Gigabit SFP ports without requiring additional power on the network. The unit is designed for home and small business users in mind and is ideal for installations where AC power is not available or no cost-effective.

No configuration is required and installation is quick and easy. Support for Auto – MDI / MDI-X on all of the ports, eliminate the need for crossover connection to another switch or HUB. Auto - Negotiation on each port senses the link speed of a network device (either 10 or 100) and intelligently adjusts for compatibility and optimal performance.

- * 1-Year Limited Warranty for switch and 1-Year Limited Warranty for the power adaptor are available
- * This device is designed for indoor use. Do not use outdoors.
- * included are the installation manual.

2. Power over Ethernet (PoE) & Features

•Power Over Ethernet (PoE):

Power over Ethernet (PoE) integrates 48V power and data onto one single cable, eliminating the need to have AC power available at all equipment locations. Power and Data are integrated onto the same cable, supporting category 5/5e up to 100 Meters. PoE provides power to PoE compatible devices, such as VOIP telephones, wireless LAN access points, and IP security cameras.


PoE devices are ready in the market, saving up to 50% of overall installation cost by eliminating the need to install separate electrical wiring and power outlets.

•Features:

- 24 x 10/100Mbps Auto-negotiation Fast Ethernet RJ-45 ports with 24 ports PoE function (port 1 ~ port 24).
- 2 x 10/100/1000MBase_T copper RJ-45 ports + 2 x 10/100/1000MBase_T SFP ports.
- Compliant with IEEE 802.3af.
- Managed Web-Smart
- Supports PoE power up to 340W for all PoE ports.
- Supports PoE IEEE802.3af compliant Powered Device (PD)
- Each port supports auto MDI/MDIX, so there is no need to use cross-over cables.
- Full/half duplex transfer mode for each port.
- Wire speed reception and transmission.
- Up to 4K unicast address entries per device. Self-learning, and table aging.
- 2.75Mb RAM packet buffer.

3. Unpacking and Installation

2. Front Panel LED PoE Network

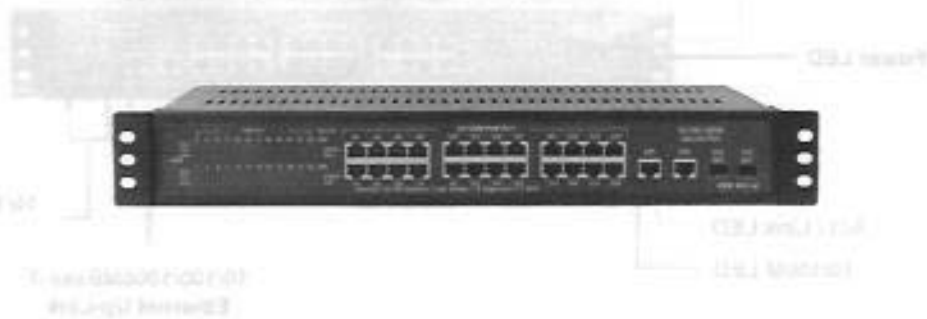

Open the received cartons of the **MODEL** and carefully unpack its contents. The cartons should Included following items:

- One **MODEL 24+2 10/100/1000M Ethernet Web-Smart PoE Switch**.
- 2 SFP module (Optional)
- One AC to DC Power Adaptor.
- One Operation manual CD-ROM.
- Four rubber feet with adhesive backing.
- Quick Installation Guide.

If any item is found missing or damaged, Please contact your local reseller for replacement.

4. System Requirements


•Installation:

The installation of the **24+2-port 10/100/1000M Ethernet PoE Switch** requires the following steps:

- A computer with a 10/100/1000MBase-T network adapter installed.
- The surface must support at least 6.0Kg (13.2 lbs) for the switch.
- The power adaptor should be within 1.5 meters (5 feet) of the switch.
- Visually inspect the DC power cord and make sure that is fully secured to the power outlet.
- Make sure that there is proper heat dissipation from and adequate ventilation around the switch. Do not place heavy objects on the switch.

5. Front Panel/LED/PoE Network

Front Panel

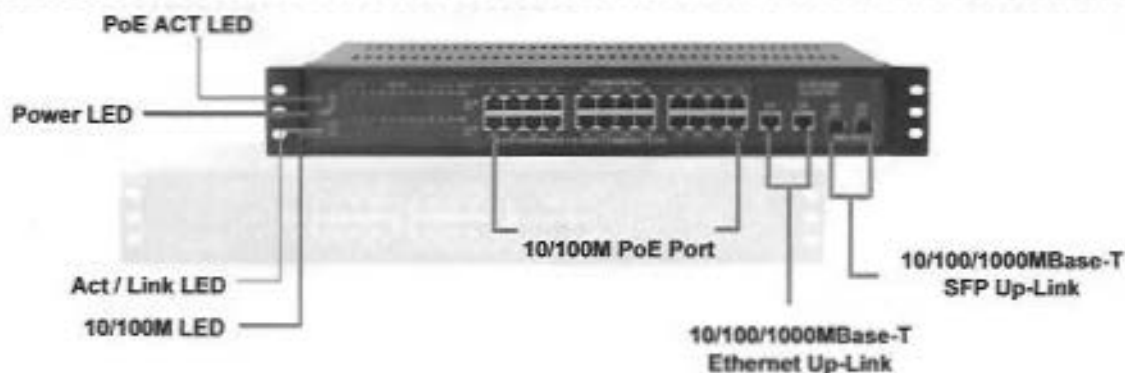


LED Display

●: Light ○: Blinking Slowly ○: Inactive ✱: Blinking Fast	
Power LED	LED on: Power ON / LED off: Power off.
10/100M (1-24)	● : Link for 100Mbps, ○ : Link for 10Mbps.
LINK/ACT (1-26)	● : Link in full duplex mode and no activity ✱: Activity ongoing ○ : Link in half duplex mode and no activity ○ : Link down
10/100/1000M (24)	● : Link for 1000Mbps, ○ : Link for 100Mbps, ○: Link for 10Mbps
Gigabit Act / Link(25-26)	● : Link in full duplex mode and no activity ✱: Activity ongoing ○ : Link in half duplex mode and no activity ○ : Link down
PoE (1 to 24)	LED on: The PoE power device (PD) is connected and the port is supplying power successfully LED off: no PoE power device (PD) connected

Interface Port

Port 1-24 PoE	10/100MBase-T Ethernet PoE Port 1 – Port 24. 8P8C RJ-45.
Port 25-26 1000MBase-T	10/100/1000MBase-T Data Up-Link port 25-26 8P8C RJ-45.
Port 25-26 1000M SFP	10/100/1000MBase-T Data Up-Link port 25-26 SFP LC type.

Rear Panel

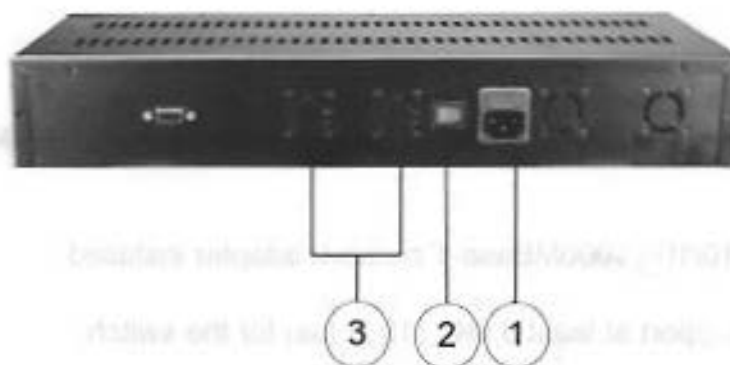

1	AC Power Input Outlet: Input 100V~240VAC 2.0A 50-60Hz
2	Power Switch
3	Fan Window

6. Hardware Installation


A: Power: Connect the AC Power Cord to the MODEL and then to a power outlet.

AC Power
Outlet



AC Power Cord

B: Up-Link Connect a CAT-5, 5e 6 RJ-45 network cable or 50/62.5um Fiber cable from the Computer or Router to an Up-Link port.



50/62.5um
Fiber Cable




Cat 5e /6 Copper Cable



Connecting Ethernet Cables and Fiber Cable

PoE Ethernet Network Diagram

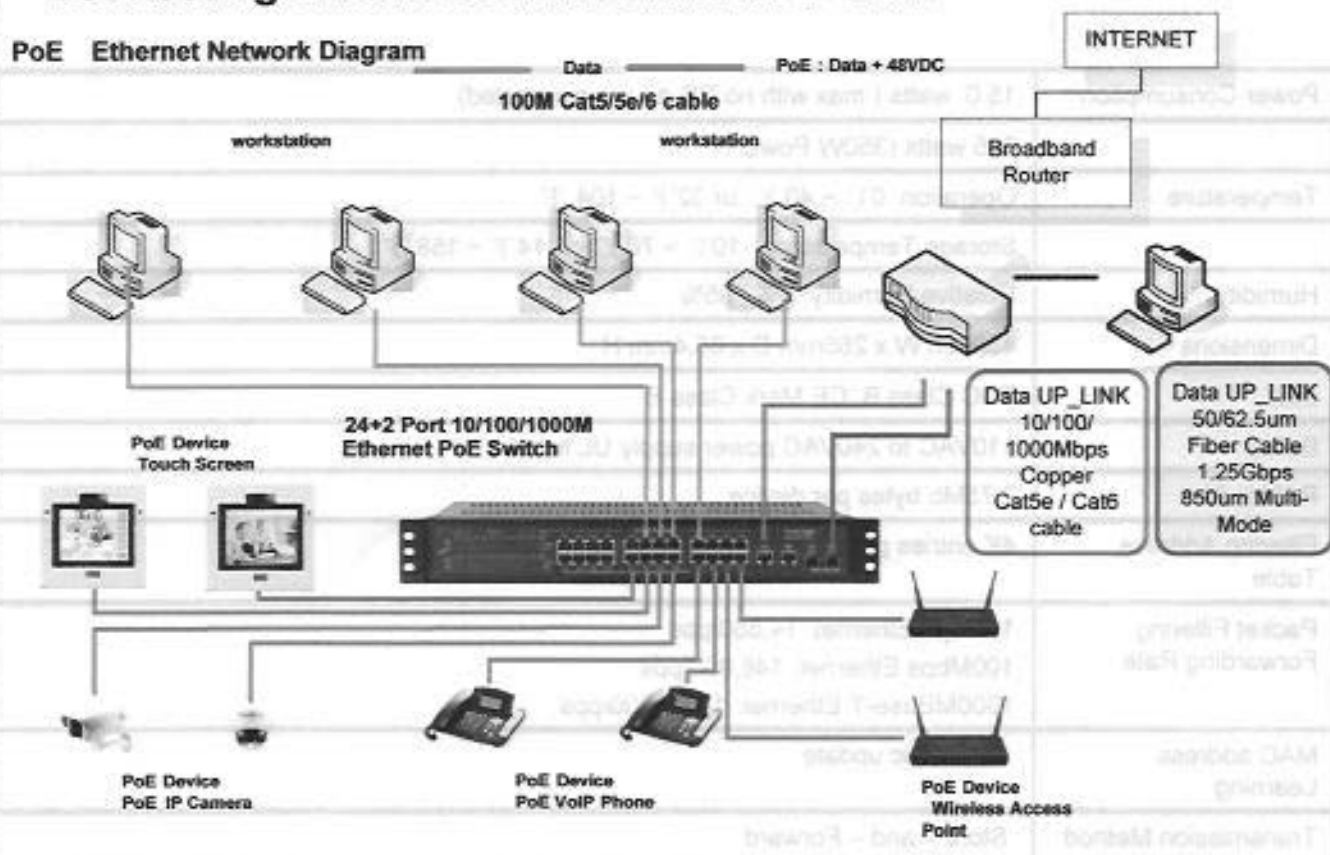

7. Technical Specifications

Standard	IEEE 802.3 10BASE-T Ethernet
	IEEE 802.3u 100BASE-TX Fast Ethernet
	IEEE 802.3x Full Duplex Flow Control
	IEEE 802.3af Power over Ethernet
	IEEE 802.3ab 1000Base-T Gigabit Ethernet (twisted-pair copper)
Protocol	CSMA/CD
Data Transfer Rate	Ethernet: 10Mbps (half-duplex), 20Mbps (full-duplex)
	Fast Ethernet: 100Mbps (half-duplex), 200Mbps (full-duplex)
	Gigabit Ethernet: 2000Mbps (full duplex)
Network Cables	10Base-T: 2-pair UTP Cat 3, 4, 5 up to 100 meters.
	100Base-T : 2-pair UTP Cat 5, 5e up to 100 meters.
	1000Base-T: 4-pair UTP Cat5e 6, up to 100meters.
	50/62.5um LC signal model or Multi model fiber cable.
Number of Ports	24 x 10/100Mbps auto-MDIX RJ-45 ports with 24 PoE enabled ports.
PoE power on RJ-45	Power +: pin 3 & pin 6 : Power -" pin 1 & pin 2
Power Supply	Input: 100V ~ 240VAC, 50Hz ~ 60Hz. Output: 48VDC 7.3A(350W)

Power Consumption	15.0 watts (max with no PD device connected)
	335 watts (350W Power)
Temperature	Operation: 0°C ~ 40 °C or 32°F ~ 104 °F
	Storage Temperature: -10°C ~ 70 °C or 14°F ~ 158 °F
Humidity	Relative Humidity: 5% - 95%
Dimensions	430mm W x 256mm D x 66.4mm H
EMI	FCC Class B, CE Mark Class B
Safety	110VAC to 240VAC power supply UL listed.
RAM buffer	2.75Mb bytes per device
Filtering Address Table	4K entries per device
Packet Filtering Forwarding Rate	10Mbps Ethernet: 14,880/pps 100Mbps Ethernet: 148,800/pps 1000MBase-T Ethernet: 1,488,000/pps.
MAC address Learning	Automatic update
Transmission Method	Store – and – Forward

Network Management

Switch Feature		Layer 2 Protocol	
System Configuration	1. Authentication. 2. IP configuration 3. System Status 4. Load Default 5. Firmware update 6. Reboot Device	1. STP/RSTP 2. LACP 3. Loopback detection	
Port Management	1. Port Configuration 2. Port Mirroring 3. Bandwidth Control 4. Broadcast Storm	Hi Layer Protocol 1. TFTP server 2. HTTP server 3. DHCP relay agent option 82	
VLAN	1. VLAN Mode: 20 tag based VLANs 2. Tag: Remove/add tag for tag base VLAN 3. Multi-to-1 VLAN	Console Command 1. CLI 2. Telnet 3. One to Multi upload	
Per port counter	Provides one of 4 group of counter	Management Protocol	
Trunk	1. Source MAC address and destination MAC address 2. Source MAC address only. 3. Destination MAC address only. 4. Port ID	SNAP 1. System Group 3. Interface Group	
QoS Setting	1. Scheduling mode 2. Priority Queue Mapping 3. Class of Service Rule.	PoE 1. Global 2. Port	
Security Filter	1. Physical port to MAC address binding. 2. TCP/UDP port number filter.		
Configuration Backup/recovery			
Miscellaneous	1. Aging time. 2. IGMP Snooping. 3. VLAN striding.		
Layout			

1> After connecting the Switch to a power outlet, the LEDs do not turn on.

Check the connection of the power cord to the PoE Switch and the power outlet.
Check that the power outlet is receiving power.

2> When I connect a computer to the Switch's port, the Link/ACT LED turns on, but the 100Mbps LED remains off.

When the 100Mbps LED is off, the computer's connection speed is 10Mbps.

3> After I connect my PCs to the Switch, I am unable to share files.

1. Check the LEDs on the Switch. Make sure the **Link/ACT LED** is on.
2. Check the network cable. The minimum length of the cable is 1.5 meters and the maximum length of the cable is 100 meters.
3. Disable any software firewall program.
4. Verify that you have file sharing enabled. Please contact your Operating System support for more information.

4> After I connect my PCs to the Switch, I can only get onto the Internet from one computer.

The Switch is not designed to share Internet between multiple computers. You need to get an Internet router.

5> Where is the uplink port located on the Switch?

Since all the ports on the Switch are Auto-MDIX, any of the ports can be used as an uplink port. If you still encounter problems or have any questions regarding this PoE switch please contact your local Technical support department.

1> After connecting the Switch to a power outlet, the LEDs do not turn on.

Check the connection of the power cord to the PoE Switch and the power outlet.
Check that the power outlet is receiving power.

2> When I connect a computer to the Switch's port, the Link/ACT LED turns on, but the 100Mbps LED remains off.

When the 100Mbps LED is off, the computer's connection speed is 10Mbps.

3> After I connect my PCs to the Switch, I am unable to share files.

1. Check the LEDs on the Switch. Make sure the **Link/ACT LED** is on.
2. Check the network cable. The minimum length of the cable is 1.5 meters and the maximum length of the cable is 100 meters.
3. Disable any software firewall program.
4. Verify that you have file sharing enabled. Please contact your Operating System support for more information.

4> After I connect my PCs to the Switch, I can only get onto the Internet from one computer.

The Switch is not designed to share Internet between multiple computers. You need to get an Internet router.

5> Where is the uplink port located on the Switch?

Since all the ports on the Switch are Auto-MDIX, any of the ports can be used as an uplink port. If you still encounter problems or have any questions regarding this PoE switch please contact your local Technical support department.