

PM-PR1275ZJ

Vertical Pole Mount Bracket

Model	PM-PR1275ZJ
Parameter	Vertical Pole Mount Bracket
Appearance	Hikvision White
Range of Application	It can be used with some wall mount bracket Diameter of clamp: $\Phi 67\text{mm}$ - 127mm
Material	Aluminum Alloy Q195
Dimension	$127 \times 46 \times 250\text{mm}$
Weight	1345g


Notice:

- The site of screw hole should be noticed when using with wall mount bracket
- Load capacity of pole should be more than 3 times the weight of camera and bracket
- Load capacity of clamp is 10KG

Features:




- For pole mounting
- The clasp is made of stainless steel
- Mounting board is made of aluminum die-casting alloy

Dimension:

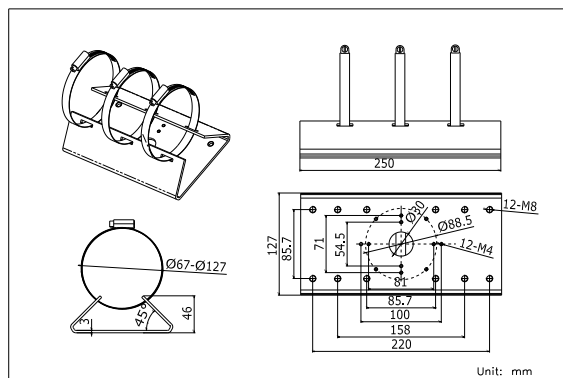


Installation Step:

- ① Contrarotate the rotary knob and open the clamp
- ② Thread the clamp through the hole of mounting board
- ③ Clasp the clamp around the pole and rotate the rotary knob clockwise for tightening



This bracket can be used with some wall mount bracket to realize vertical pole mount, which is as follows:

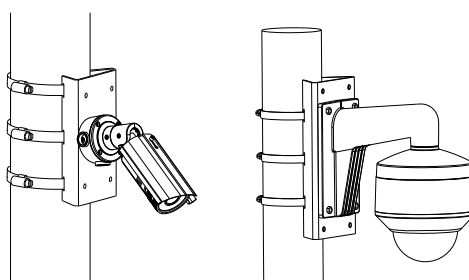

Note: The actual bracket may vary from the picture above.