



Smart[®]

VIDEO DOORBELL

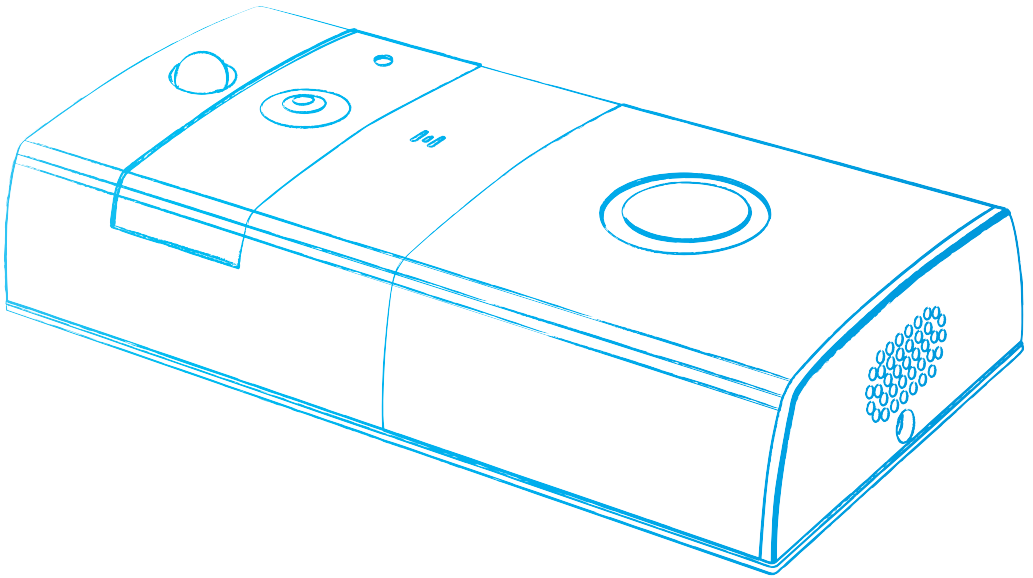

Quick Start Guide

• Product Drawing - Front

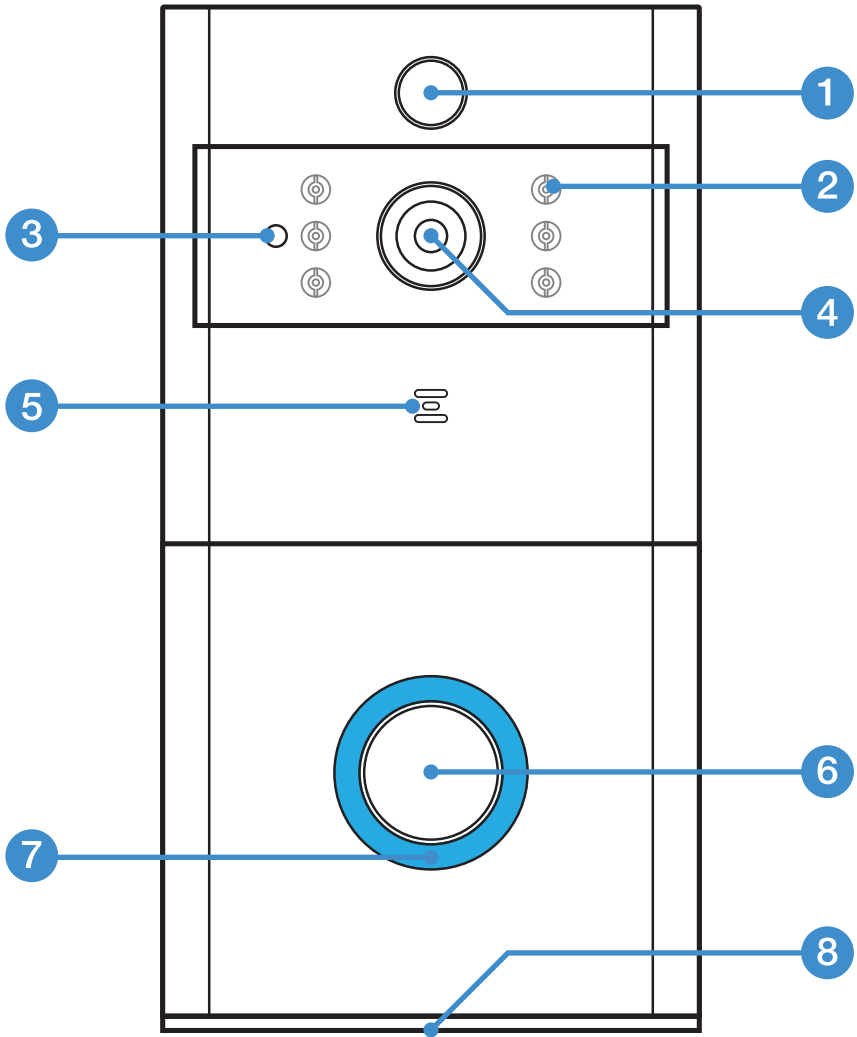

1. PIR Motion Sensor

2. Infrared LED × 6

3. Light Sensor

4. 166° HD Camera


5. Microphone

6. Push Button

7. LED Indicator

8. Speakers

• Product Drawing - Back

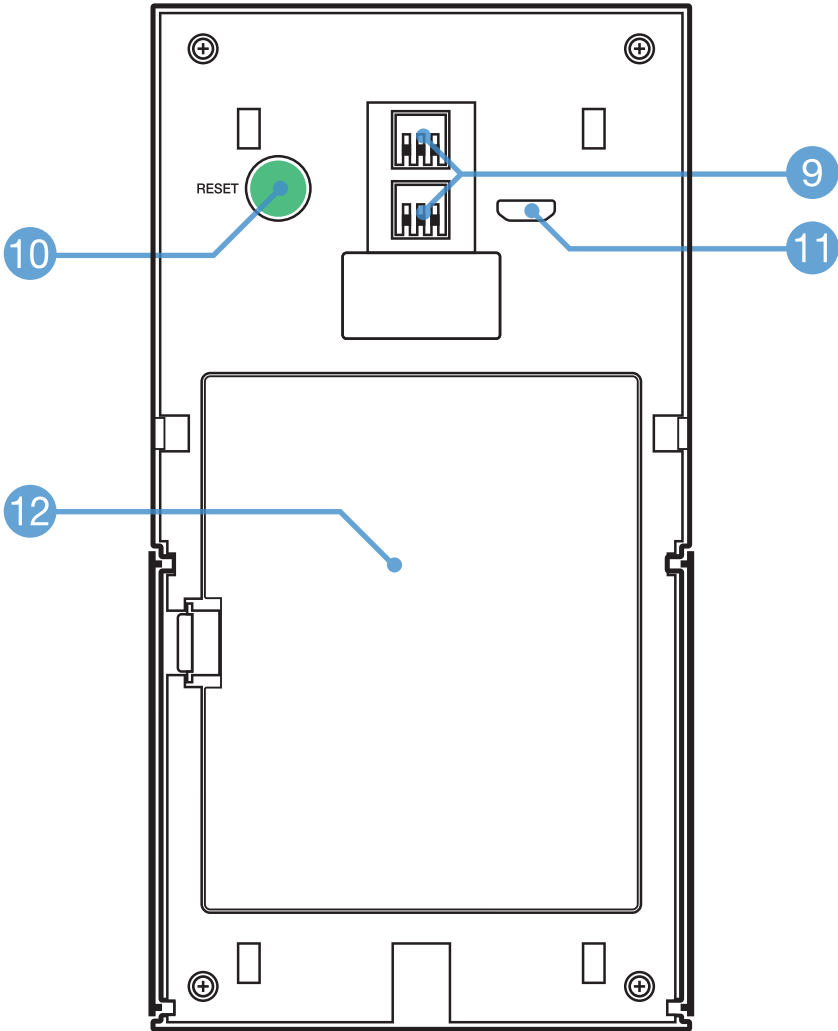


9. AC8V~24V Power Interface

10. Reset Button

11. Micro USB Port (Battery Charging)

12. Battery Compartment Cover

• Product Drawing - Mounting Bracket

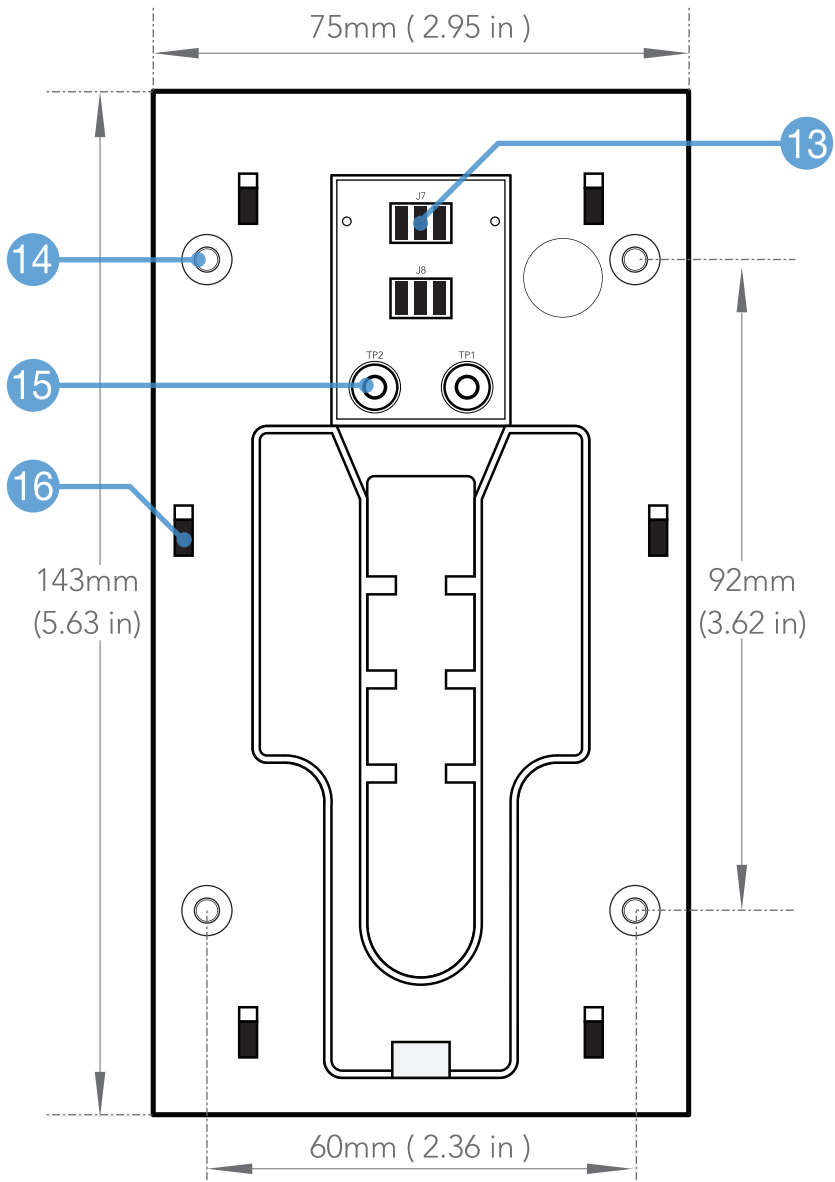


13. Power Contact Base

14. Screw Holes x 4

15. Wire Terminals



16. Mounting Hooks x 6

• Installation -Bracket Install

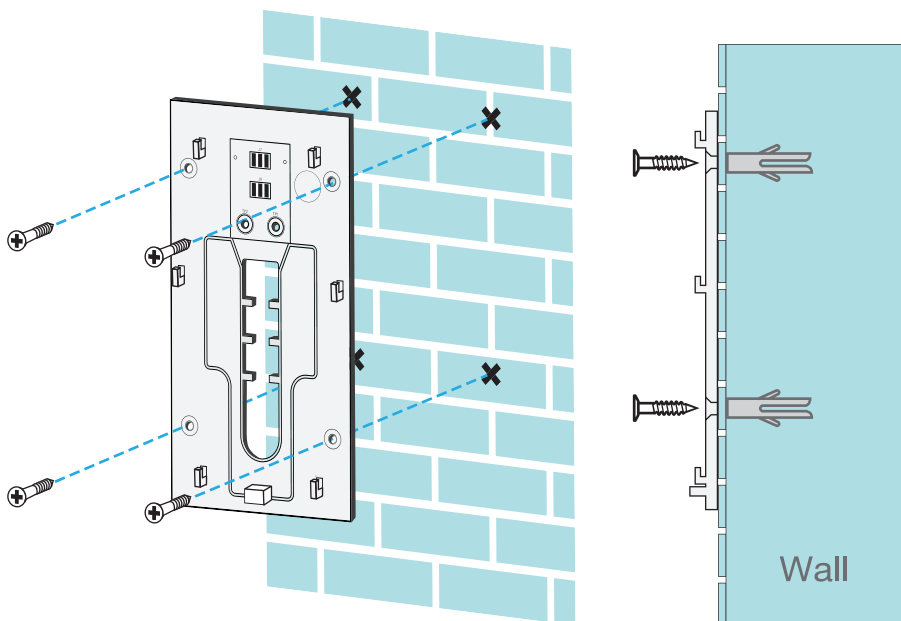


② Seal Tightly

③ Tighten to secure

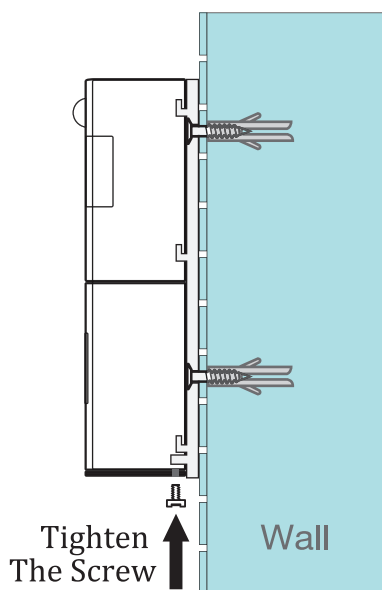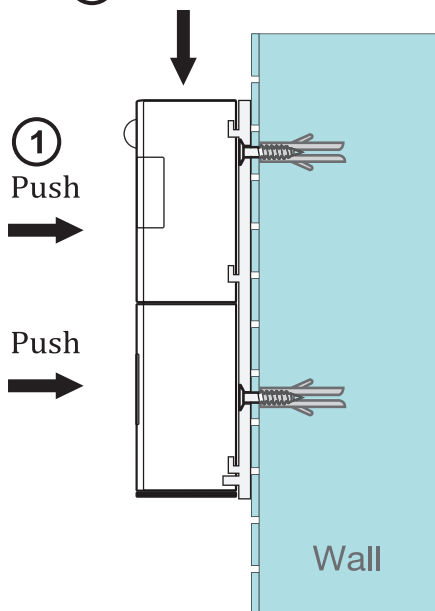

• Power Supply Solution

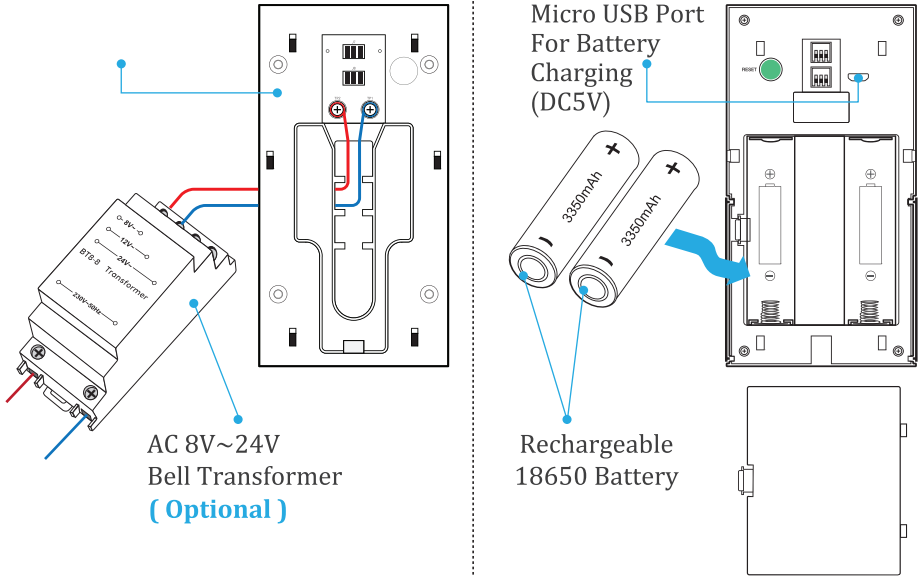

• App Download - ToSee



ToSee



iOS



Android

ToSee is available for both iOS and Android OS. Search the name "ToSee" in App store or Android Market, or scan upper QR-code to download the APP.

• Device Configuration



Tap to add device

Check the Indicator

Config WiFi setting

Connect to doorbell AP



Go back to APP

Input WiFi Password

Secure your doorbell

Name your doorbell



Doorbell is ready

Tap to liveview

Incoming Call(In App)

Incoming Call(Backstage)


• Live View Interface



1. Control the scene volume
2. Playback recorded videos
3. Image effect configuration
4. Full screen view
5. Screenshot button
6. Talk to visitor
7. Tap to record on smart phone
8. Share the device to other users
9. Setting menu
10. Back to device list
11. Battery charging icon

(Low battery alert : )

• Setting Menu

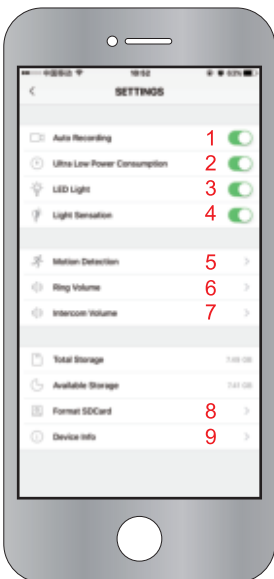

1. Enable/disable auto recording
2. Enable/disable power saving
3. LED light on/off switch
4. Enable/disable light sensor
5. Motion detection sensitivity config
6. Ring volume config
7. Intercom volume config
8. Format Micro SD card button
9. Device info