


CAT5 ENHANCED 350MHz UTP CMR RATED

DESCRIPTION

Category-5E, 24AWG, UTP, 8C Solid Bare Copper, CMR Rated, PVC Jacket 1,000ft.

FEATURES

- High-Performance Data Cable
- 350MHz Bandwidth for Data Applications
- Category-5E Unshielded Twisted Pair
- 24AWG Solid Copper Conductors
- Easily Identified Color-Striped Pairs
- Exceeds TIA/EIA-568C.2, ISO/IEC 11801
- Riser Rated PVC Jacket, CMR
- ETL Listed, RoHS Compliant
- 1,000ft Pull Box

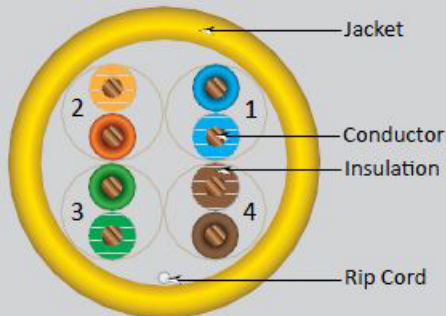

Technical Data

Rated Temperature	75 °C
Rated Voltage	30v
Product Standard Certification	CMR
Conductor	Solid Bare Copper
Size	24 AWG
Insulation	PE
Average Thickness (mm)	0.203
Min. Point Thickness (mm)	0.172
Insulation Diameter (±0.005mm)	0.88
Twisted Pair Diameter (±0.01)	1.76
Assembly Diameter	3.60
Jacket	PVC
Average Thickness (mm)	0.60
Min. Point Thickness (mm)	0.54
Outer Diameter (±0.10mm)	5.00
Rip Cord	Yes
Color of Pairs	
Pair 1	Blue,White-Blue
Pair 2	Orange,White-Orange
Pair 3	Green,White-Green
Pair 4	Brown,White-Brown
Mechanical Characteristics	
Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≥13.8
Aging Elongation (%)	≥100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	≥85% of unaged
Aging Elongation (%)	≥50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4003289 ETL VERIFIED CAT5E TO TIA-568C.2 ISO/IEC 11801:2002 CMR 24 AWG UTP c(ETL)us FT4 350MHz RoHS XXXFT (SEQUENTIAL FOOT MARKERS ON JACKET)

MADE IN CHINA



CAT5 ENHANCED 350MHz UTP CMR RATED

PERFORMANCE

Electrical Characteristics:

1.0-100MHz Impedance (Ohms)	100±15
100-200MHz Impedance (Ohms)	100±15
200-350MHz Impedance (Ohms)	100±15
1.0-350MHz Delay Skew (ns/100m)	≤45
Pair-to-Ground Capacitance Unbalance (pF/100m)	≤330
Max. Conductor DC Resistance 20°C (ohms/km)	93.8
Resistance Unbalance (%)	≤5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max	Next (ns/100m)	ACR Typ(db)
0.772	19.4	1.8	67.0	67.7
1	20.0	2.0	65.3	67.3
4	23.0	4.1	56.3	56.2
8	24.5	5.8	51.8	50.0
10	25.0	6.5	50.3	47.8
16	25.0	8.2	47.3	44.0
20	25.0	9.3	45.8	41.5
25	24.3	10.4	44.3	38.9
31.25	23.6	11.7	42.9	36.2
62.5	21.5	17.0	38.4	27.4
100	20.1	22.0	35.3	19.3
200	18.0	32.4	30.8	3.5
300	16.8	41.0	28.2	-----
350	16.3	44.9	27.2	-----

Frequency (Mhz)	PSNext (Min dB)	ELFEXT Min(db/100m)	PSELFEXT Min(db/100m)
0.772	64.0	66.0	63.0
1	62.3	63.8	60.8
4	53.3	51.7	48.7
8	48.8	45.7	42.7
10	47.3	43.8	40.8
16	44.3	39.7	36.7
20	42.8	37.7	34.7
25	41.3	35.8	32.8
31.25	39.9	33.9	30.9
62.5	35.4	27.8	24.8
100	32.3	23.8	20.8
200	27.8	17.7	14.7
300	25.2	14.2	11.2
350	24.2	12.9	9.9

