

Product Specifications

Elite Series DVR - 8, 16 & 32 Channel

Features:

- High performance standalone DVR
- 8, 16 Video Loopout Channels Except on 32CH DVR
- Up to 32 cameras with full HD 1080P display
- H.264 video compression algorithm ideal
- Dual encoding streams supported
- TV(BNC)/VGA/HDMI synchronous video output
- live, recording, playback, backup & remote access
- 8, 16 channel simultaneous playback
- Smart video detection: MD, camera blank, video loss
- 3D intelligent positioning with PTZ dome
- Easy backup: USB devices, CD /DVD -RW & network download
- Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload
- Up to 8 SATA HDDs & CD/DVD-RW, 1 eSATA, 2 USB2.0
- Built-in web server, multi-DVR client, MSS & CMS




Video Input	4, 8, 16, or 32 channel, BNC(1.0Vp-p, 75)
Video Output	1 TV, 1 Spot, BNC(1.0Vp-p, 75), 1 VGA, 1 HDMI
Audio Input	4, 8, or 16 channel, BNC(200-2800mV, 30K)
Audio Output	1 channel, BNC(200-3000mV, 5K)
Display Split	1/4/8/9/16/25/36
Display Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600
Privacy Masking	4 Self-Defined four-sided zones for privacy masking for each camera
OSD	Camera title, time, video loss, camera lock, motion detection, recording
Compression	H.264 / G.711
Image Resolution	D1/4CIF(704×576/704×480) / CIF(352×288/352×240) / QCIF(176×144/176×120)

Product Specifications

Elite Series DVR - 8, 16 & 32 Channel

Bit Rate	32~2048Kb/s
Trigger Events	Recording, PTZ movement, Tour, Alarm, Email, Spot output
Alarm Input	8, 16 channel
Relay Output	6 channel
Ethernet	RJ-45 port (10/100M)
Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information
Hard Disk	Up To 8 SATA ports, 8 HDDs or 6 HDDs + 1 CD/DVD-RW, Max 16TB per HDD supported
Power Supply	AC 100~240 V, 50/60 Hz
Power Consumption	40W
Dimension	2U, 440mm×460mm×89mm(W×D×H)

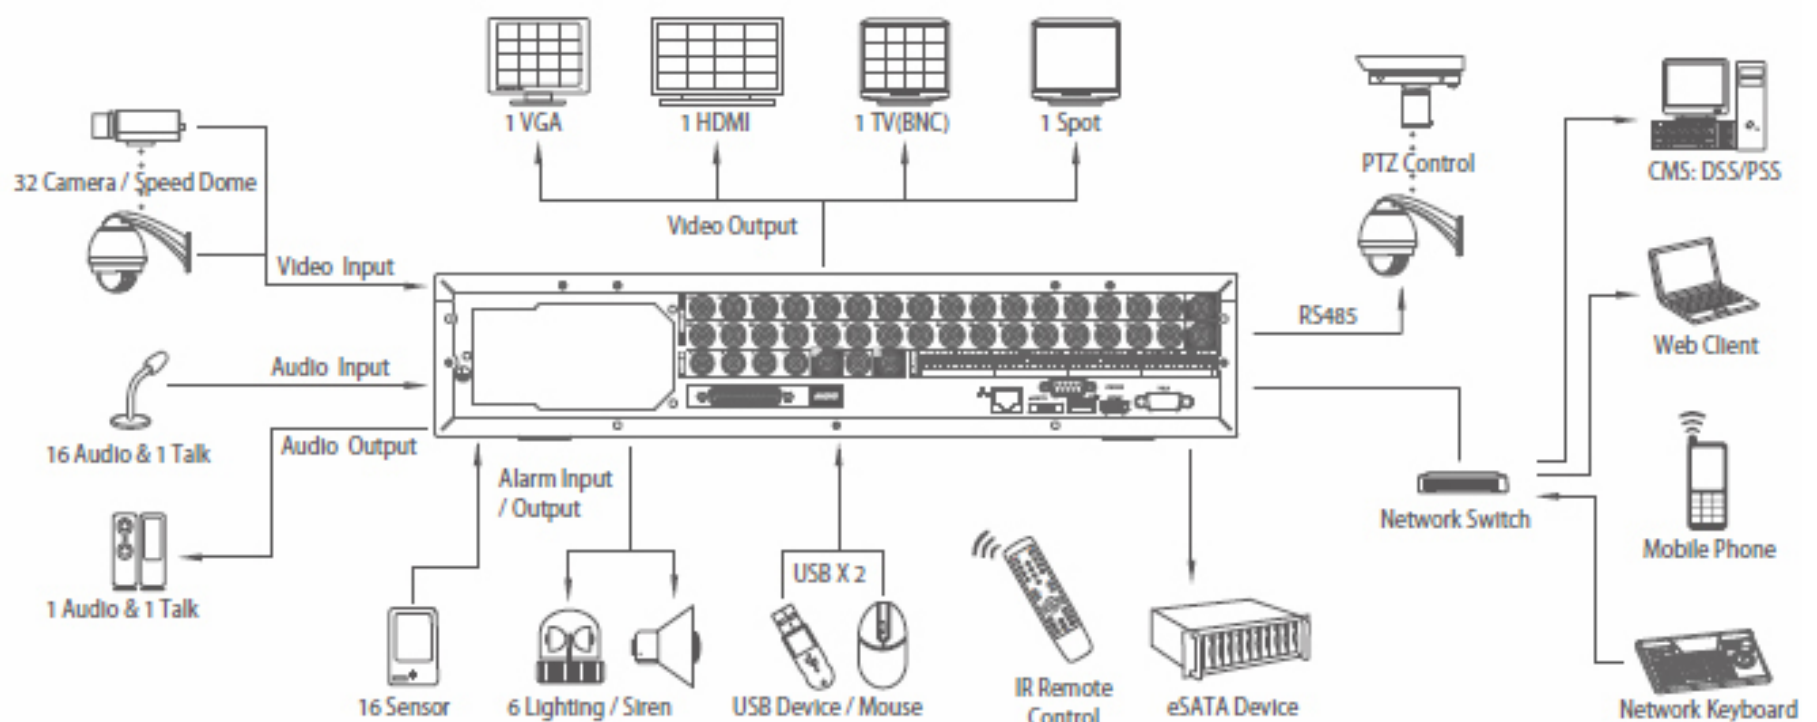

Product Specifications

Elite Series DVR - 8, 16 & 32 Channel

Front



8 Channel Back



16 Channel Back



32 Channel Back

